

Mutina


Pico ^{by} Ronan & Erwan Bouroullec

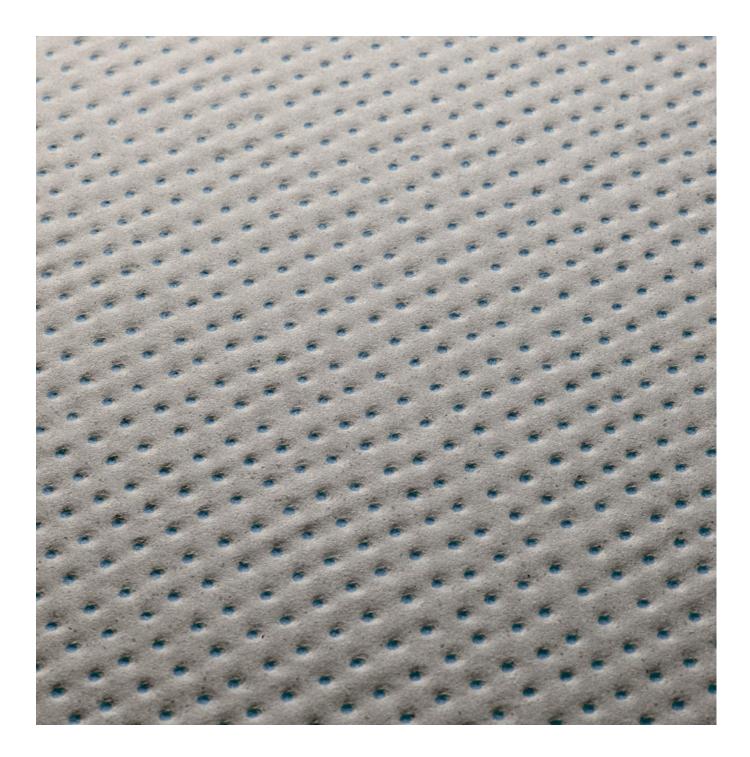

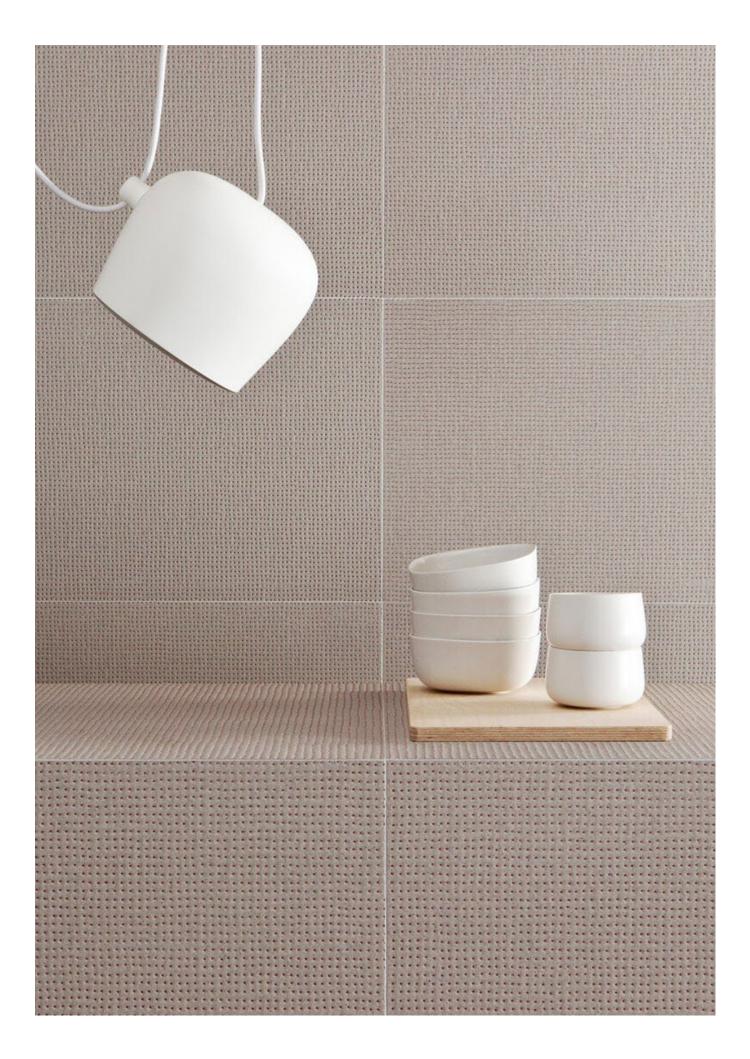

Colors

BLANC

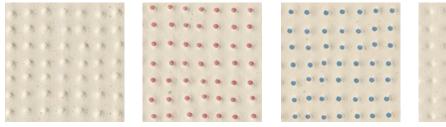

Down natural blanc

Red dots blanc

Blue dots blanc



Up natural blanc

grout: bianco 50

GRIS



Down natural gris

Red dots gris







Up natural gris


grout: Kerakoll ferro 04

BLUE





Up blue



Up red

grout: Kerakoll ferro 04 grout: ecrù 52

Mutina

General information

collection		Pico							
design		Ronan & Erwan B	ouroullec, 2011 – 201	5					
production		Industrial							
material		Unglazed homoge	eneous porcelain stone	ware					
features		Squared and recti	fied slabs each one ex	actly the same	as the others				
thickness		12 mm							
nominal sizes		120·120 cm (47″ 60·120 cm (24″· 60·60 cm (24″· 2	47")						
specification		 2 base colors: Blanc, Gris 2 relief and bas-relief 1,5 mm dotted textures (UP and DOWN) Mixed color tones clay to achieve a materic and natural feeling Silk-screen decoration (no digital printing) with perfectly centered color dots Continua technology pressing process after decoration 							
complementary pieces		Step, Corner tile,	Step, Corner tile, Skirting						
awards		Red Dot Design A	Red Dot Design Award 2012, Selected for Adi Design Index 2012						
patents		Registered design	n° 001912999-0011	– date of regis	tration: 06/09/201				
category		UNI EN 14411 A	pp G (BIA group) UGL						
PICO DOWN	section								
down natural			blue dots			red dots			
0 0	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	© ○ ○ ○ ○ ○ ○ ○ ○ ○ ○ ○ ○ ○ ○ ○ ○ ○ ○ ○ 60·60 cm 24″· 24″	120·120 cm 47"· 47"	60.120 cm 24". 47"	60.60 cm 24". 24"	120·120 cm 47"· 47"	60.120 cm 24". 47"	60.60 cm 24". 24"	
PICO UP	section	<u></u>							
up natural			up						
$ \begin{array}{c} \circ \circ$	© © O	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 60 0 cm 24" 24"	120-120 cm 47"· 47"	60-120 cm 24"- 47"	60.60 cm 24"· 24"				
complementary pieces									
step 33·120·4,5 cm 13″· 47″·17/8″	120 	. 33	corner tile 33·120·4,5 cm 13"· 47"·17/8"	120 	33 : 4,5	skirting 3,8:60 cm 2"·24" available only in down natural	3,8 .	60 sezione section	

Laying and maintenance tips

use	Floor, wall – indoor, outdoor.			
installation	For an even, smooth shading effect when laying, alternate material from several different boxes. The double spreading technique is recommended for the 120x120 size.			
recommended adhesive	Adhesive for porcelain stoneware.			
recommended joints	2mm joints. Use wedges to fix the caliber differences in work size between tiles.			
recommended fillers	Cement-based grout / epoxy grout. Remove all traces of grout carefully before it dries completely.			
cleaning at the end of installation	CEMENT-BASED GROUT: Buffered acid (e.g. DETERDEK PRO by FILA, or similar). Wet the floor with water, dilute the product 1:5 with water and pour it on the floor. Wait for 2 or 3 minutes then use a white scotch brite pad and rinse well with clean water. EPOXY GROUT: Alkaline detergent (e.g. FILA CR10 by FILA). FILA CR10: apply pure, wait for 30 minutes then use a green scotch brite pad. SILICONE: Solvent for silicone (e.g. FILA ZERO SIL.). Pour it straight onto the stain, wait for 20 minutes and remove the mark using scotch brite. PAINT: Can usually be removed using water, but if resin-based paints or particular enamels have been used, it is best to ask the manufacture which solvent is most suitable. RUST: stain remover es. FILA NO RUST. Apply the product onto the stain, leave for 15 minutes, remove the residue and rinse thoroughly.			
general cleaning (installed tiles)	You are recommended to use ordinary neutral detergent diluted in water. Avoid using acid or alkaline products, waxes and/or impregne During ordinary cleaning it is recommended to use extremely abrasive items (such as scourers and iron or steel sponges) as little as poss This recommendation must be adhered to rigorously in the case of tiles with a glossy surface finishing as they are more susceptible to the of scuffs, scratches and loss of shine, etc. In the event of heavy dirt or particularly textured surfaces, use an alkaline detergent and rinse washing. For large surfaces, the use of a floor washing machine is recommended. During every-day cleaning procedures, it is necessary remember that certain types of dirt (dust, sand) increase the abrasive effect of foottraffic. Therefore we recommend that you avoid bring in this type of dirt, which comes in from the outside, by placing a door-mat at the entrance.			
calibers (real size)	60 cm x 60 cm -> 594 mm x 594 mm 120 cm x 120 cm -> 594 mm x 1190 mm 120 cm x 120 cm -> 1190 mm x 1190 mm			